Technical Bulletin 3015

GHSI 750 Series

Spring-Loaded 4-20 mA Position Transmitters



Features

- Full ranges of 0.10 inch to 4.00 inches
- · In-line connector, mating plug included
- 4 to 20 mA input/output
- Repeatability of 0.0001 inch
- Non-linearity of ±0.10% of FRO or better
- Coil environmentally sealed to IEC IP-68

Applications

- Industrial gaging systems
- Steam turbine shell expansion
- Safety valve seating verification
- Materials testing apparatus
- · Pinch and gap roller alignment

Description

The Macro Sensors GHSI 750 Series of 3/4 inch diameter spring-loaded, loop-powered LVDTs are designed for a wide range of position monitoring, feedback, and dimensional gaging applications. These rugged hermetically sealed sensors are constructed entirely of stainless steel and intended for general industrial use. The coil windings are sealed against hostile environments to IEC standard IP-68. The input/output connections are made through a sealed axial connector, and a mating connector plug is supplied with each unit.

The sensor consists of a spring loaded shaft running in a precision sleeve bearing and connected to the core of an LVDT. The use of a precision sleeve bearing results in measurement repeatability of 0.0001 inches $(2.5\,\mu\text{m})$ or better. The probe shaft is fully extended by a spring exerting a nominal force of 6 to 20 ounces depending upon total range. The contact tip supplied is an AGD standard number 9 made from black oxide hardened tool steel. It is fully interchangeable with other 4-48-threaded AGD contact tips.

GHSI 750 Series transmitters offer the frictionless operation, high resolution, excellent repeatability, and low hysteresis associated with LVDT technology, along with the convenience and simplicity of precalibrated 4-20 mA current loop operation. The unit can be operated either as 2-wire loop-powered or 3-wire sourcing externally powered. The built-in electronics operate over a wide range of loop supply voltages and resistances, and are designed to operate with many PLCs, digital indicators, A/D converters, computer-based data processors, and QC data collection systems.

Available in ranges of 0.100 inch (2.5 mm) to 4.00 inches (100 mm), the maximum linearity error for a GHSI 750 Series sensor is $\pm 0.10\%$ of full range output using a statistically best-fit straight line derived by the least squares method.

For simplified mounting the GHSI 750 Series has a 1/2-20 UNF-2A thread on the front of the housing, permitting the user to install the LVDT in a mating threaded part or by using the two hex nuts furnished with the sensor. This results in a ready-to-use package for position measurements and longer range gaging applications.



Innovators in Position Sensing



Viale Partigiani d'Italia, 1 43123 Parma Tel.:0521.242495 Fax: 0521.242505 - E-mail: info.parma@leane.it

GHSI 750 Series

Technical Bulletin 3015

General Specifications

Loop Supply Voltage: 10 V to 28 V DC

Loop Resistance (Min.): 50 Ohms

Output Current: 4-20 mA, 2-wire loop

Output Noise & Ripple: $\leq 10 \mu Arms$

Frequency Response

(-3dB): 50 Hz (nominal)


Linearity Error: $\leq \pm 0.10\%$ of FRO Repeatability Error: < 0.0001 inch

 $(2.5 \, \mu m)$

Operating Temperature: $-20^{\circ}F$ to $+175^{\circ}F$

(-30°C to +80°C)


Thermal Coefficient -0.015%/°F (nominal) of Scale Factor: (-0.027%/°C nominal)

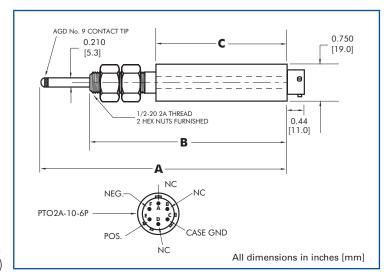

Specifications

Model ▶	GHSI 750					
Parameter ▼	-100	-250	-500	-1000	-2000	-4000
Nominal Range (inches)	0.10	0.25	0.50	1.00	2.00	4.00
Nominal Range (mm)	2.5	6.3	12.5	25	50	100
Scale Factor (mA/inch)	160	64	32	16	8	4
Scale Factor (mA/mm)	6.4	2.6	1.28	0.64	0.32	0.16
Pretravel (inches)	0.12	0.13	0.10	0.10	0.05	0.02
Pretravel (mm)	3.0	3.3	2.5	2.5	1.3	0.5
Overtravel (inches)	0.12	0.13	0.10	0.10	0.05	0.02
Overtravel (mm)	3.0	3.3	2.5	2.5	1.3	0.5
Dimension "A" (inches)	5.46	6.10	6.86	11.36	13.82	21.75
Dimension "A" (mm)	139	155	174	289	351	553
Dimension "B" (inches)	4.36	4.99	5.75	9.87	11.40	17.19
Dimension "B" (mm)	111	127	146	251	291	437
Dimension "C" (inches)	2.82	3.44	4.20	6.70	8.20	11.71
Dimension "C" (mm)	72	87	107	170	208	297
Weight (ounces)	3.1	3.6	4.3	6.4	6.7	10.5
Weight (g)	85	102	170	180	185	296

Loop Resistance vs. Minimum Loop Supply Voltage



Ordering Information

Order by model number with range For accessories, please visit our website at www.macrosensors.com.



Innovators in Position Sensing

All specifications subject to change without notice.
© 2007 Macro Sensors 05/17/07

7300 US Route 130 North, Bldg. 22

Pennsauken, NJ 08110-1541 USA

tel: 856-662-8000 fax: 856-661-8000 www.macrosensors.com lvdts@macrosensors.com

